

MEGAlink 	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

1 Megalink second monitor display kit



Contents

1	Megalink second monitor display kit.....	1
1.1	Introduction	1
1.2	Overview	2
1.2.1	Version 2.....	2
1.2.2	Version 1.....	2
1.3	Components	3
1.4	Monitor requirements.....	3
1.5	Television set requirements.....	3
1.6	Network setup examples	3
1.6.1	1-1 network.....	3
1.6.2	Local LAN	4
1.7	Get started.....	5
2	Setup	5
2.1	Setting ID on version 2.....	5
2.2	Setting ID on version 1.....	8
2.2.1	Display device ID setup.....	8
2.2.2	Set new ID on the SD card.....	9


1.1 Introduction

This document describes how to use a compatible television set as a Megalink second display.


MEGAlink	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

1.2 Overview

1.2.1 Version 2

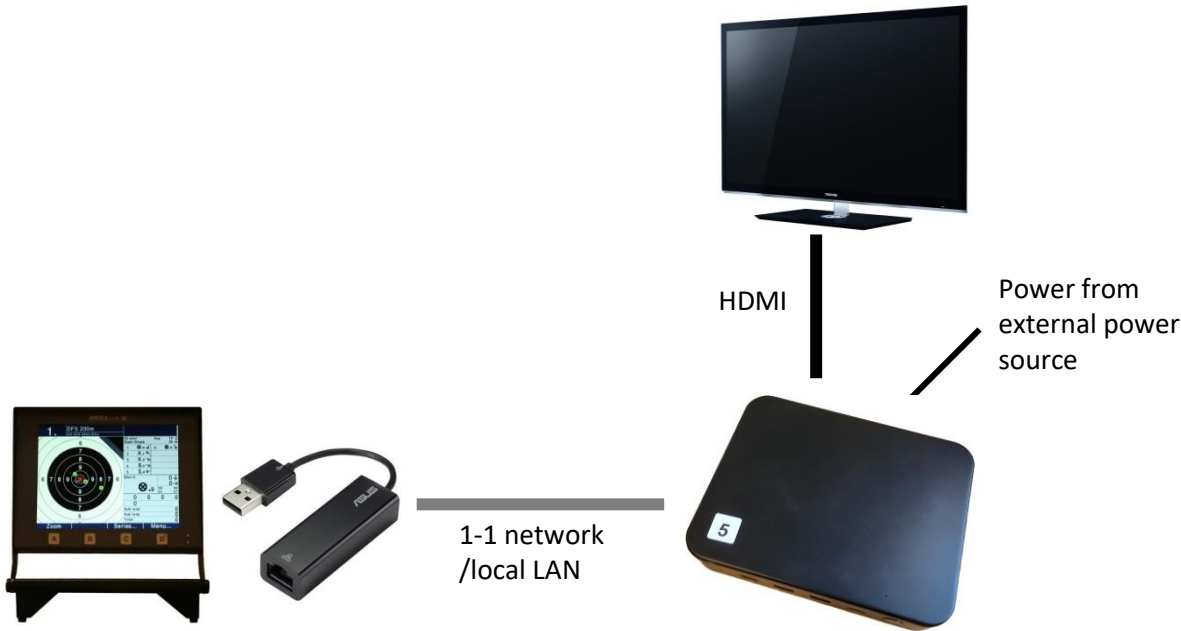

1.2.2 Version 1

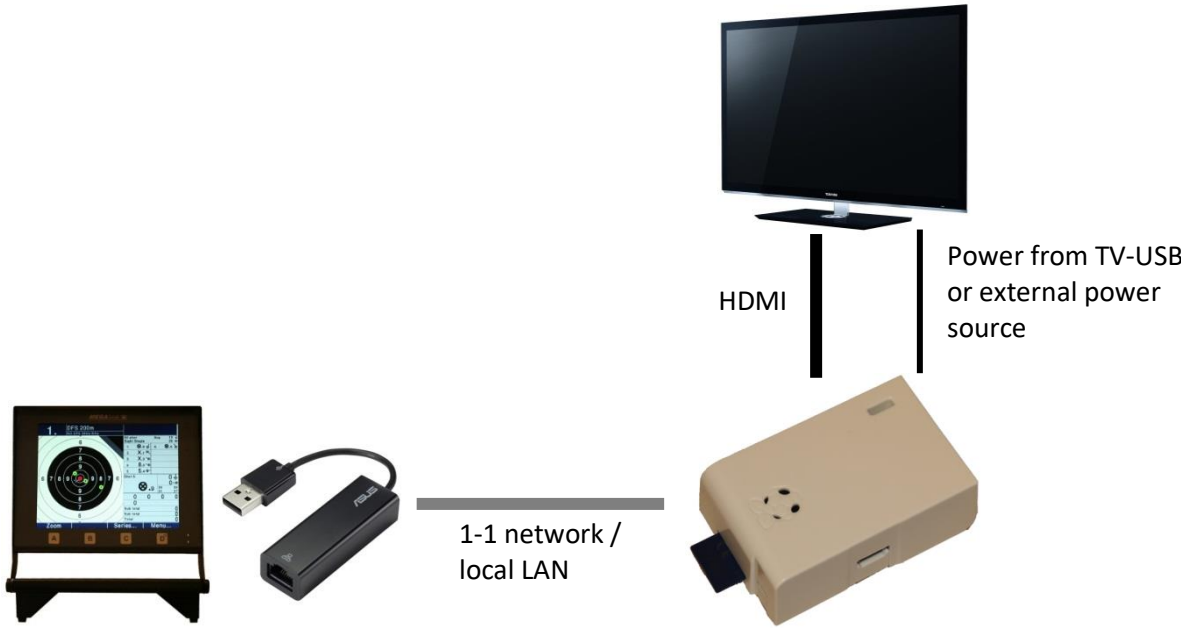

MEGAlink	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

1.3 Components

Included in kit:

- USB network adapter
- Display device
- SD card with predefined ID
- HDMI cable
- USB cable (power) (version 1 only)

Not included in kit:

- Megalink DU3 color monitor
- 1-1 network cable / local LAN components
- Television set
- Optional external USB micro power source (version 1 only)

1.4 Monitor requirements

The monitor must meet the following requirements:

- Type DU3 (Color monitor)
- Software version 13.49 or later. (Firmware 02.17). Updated software can be downloaded from www.megalink.no.

1.5 Television set requirements


The television set must have the following:

- Full HD
- HDMI input
- USB in/out (Optional for version 1. External USB micro power source can be used.)

1.6 Network setup examples


The monitors and television sets can be connected as a 1-1 network or via your local LAN.

1.6.1 1-1 network

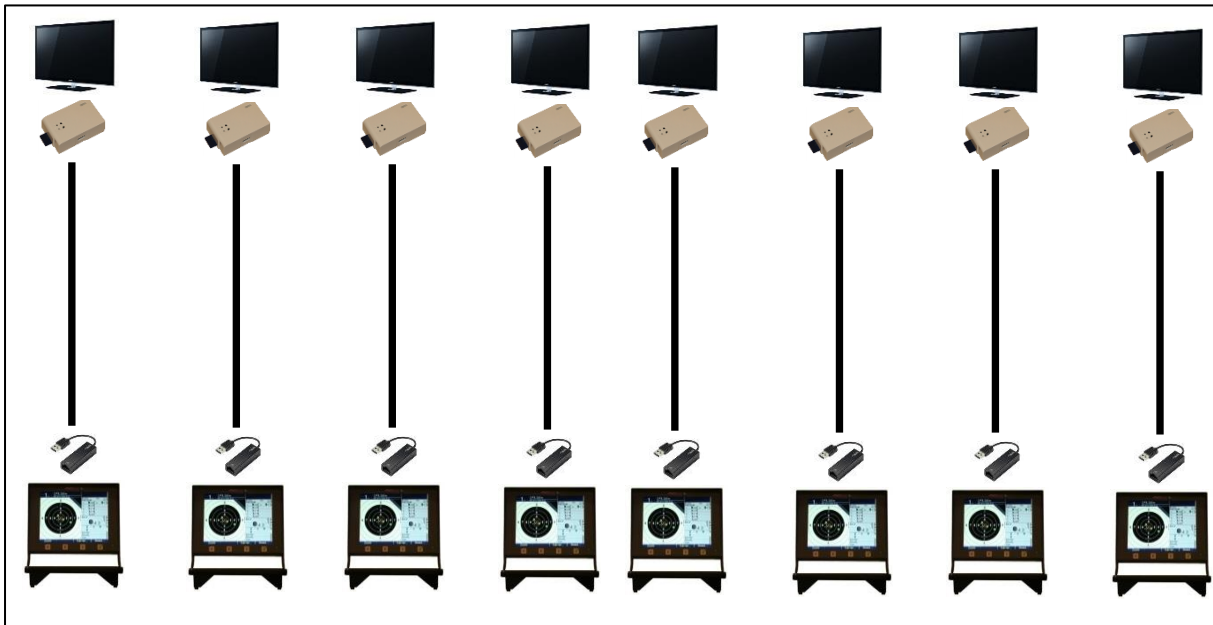

MEGAlink 	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

1.6.2 Local LAN

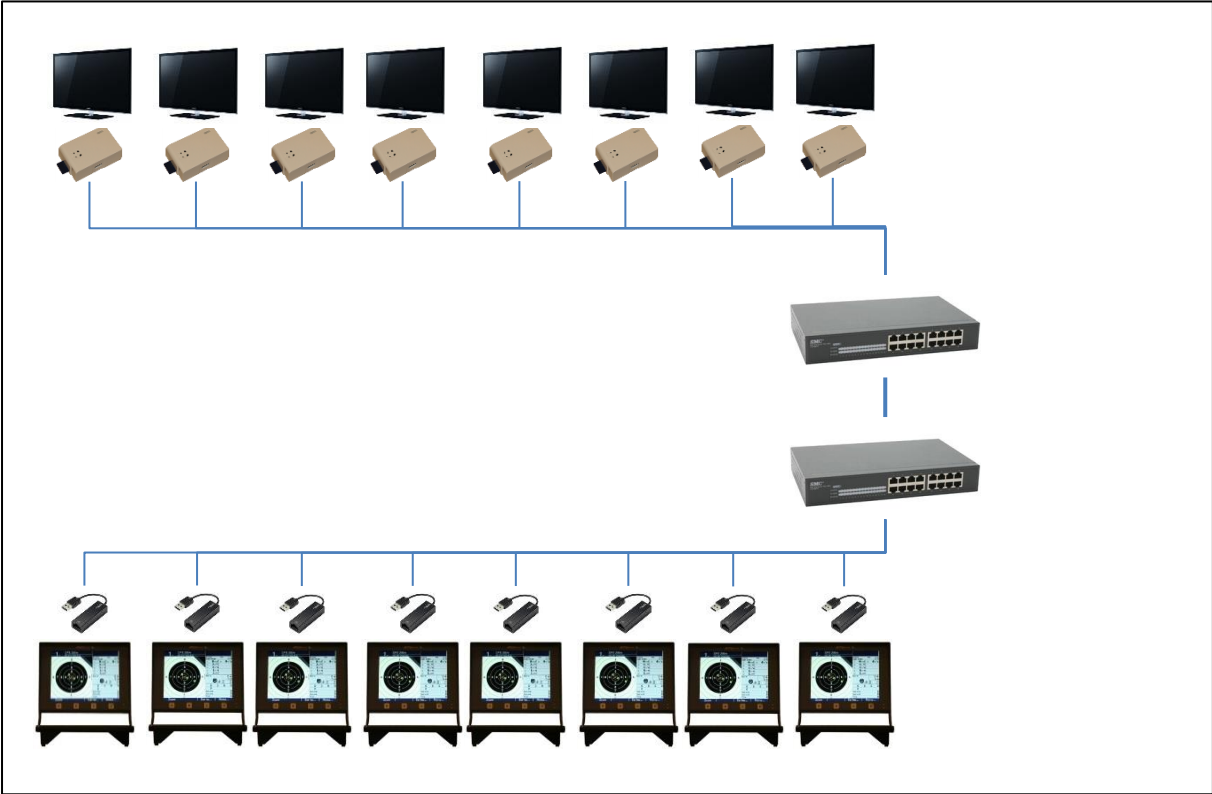

MEGA link	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

1.7 Get started

1. Connect the device with the proper ID to the television via HDMI.
2. Power up the television.
3. Power up the device using the cable from the power source (version 2) or the USB cable (version 1).
4. Wait for the Megalink logo to appear on the screen.
5. Connect the device to the monitor using the USB-Ethernet adapter and a standard network cable.
6. Power up the monitor.


If no target picture appears on the slave screen, try resetting the target number on the monitor.

2 Setup

2.1 Setting ID on version 2

The display device must have the same ID as the monitor connected. If you need to change the ID of a device, follow this procedure:

1. Download ISO file [DU-DISPLAY-SET_ID.iso](https://megalink.no/login/php/download_sw_from_server.php?file=DU-DISPLAY-SET_ID.iso) from megalink.no
https://megalink.no/login/php/download_sw_from_server.php?file=DU-DISPLAY-SET_ID.iso
2. Write the content of the ISO file to a USB 3.0 memory stick. Use balenaEtcher or similar software.
<https://etcher.balena.io/>

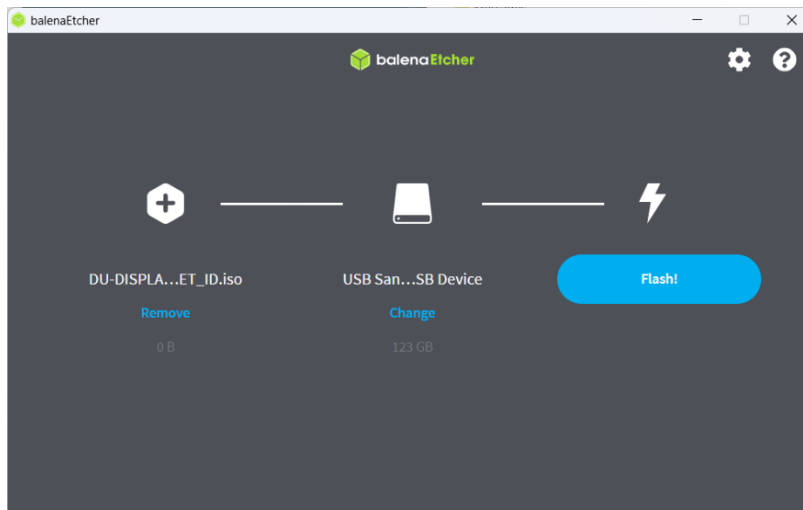

MEGAlink	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

3. Connect an USB keyboard, the HDMI cable, and the USB flash drive. Wait for the next step with power supply.




4. Simultaneously insert the power supply while pressing the F12 key.
5. Wait for the following selection to arrive on the TV screen. Scroll down and select **USB, Partition 1**





MEGAlink	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

- The following green image will appear. Use the Arrow Down button and select **Change Monitor ID** and press Enter.

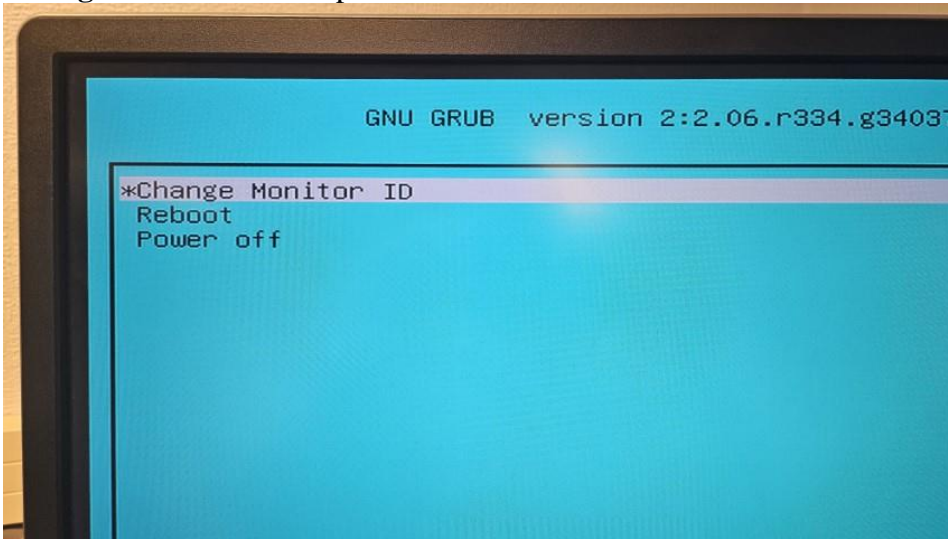


- Wait a good while
- Eventually, the text **Please enter your monitor ID:** will pop up. Enter the correct ID and press Enter. NB: Use the number keys on the left side of the keyboard. Not the ones on the right.

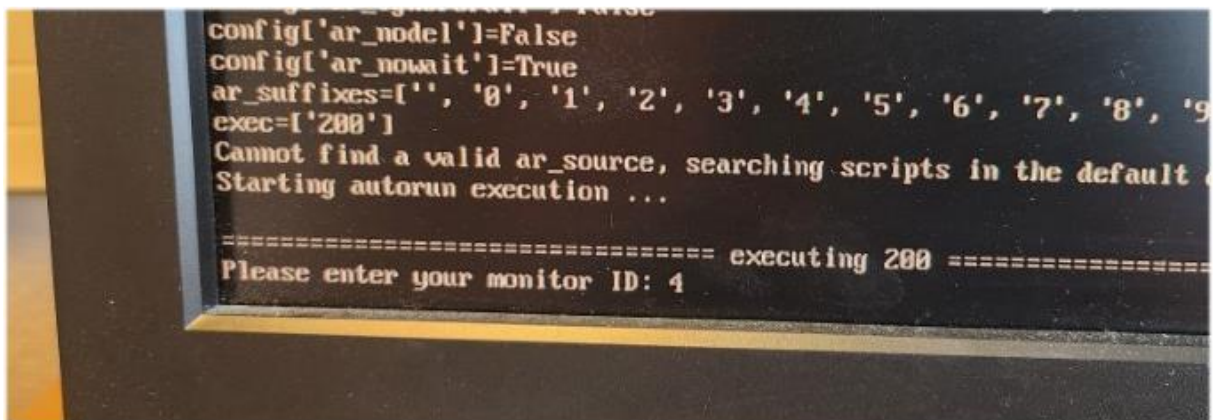

MEGAlink 	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

- When both the Megalink logo and the text ubuntu are on the screen, the device is ready.

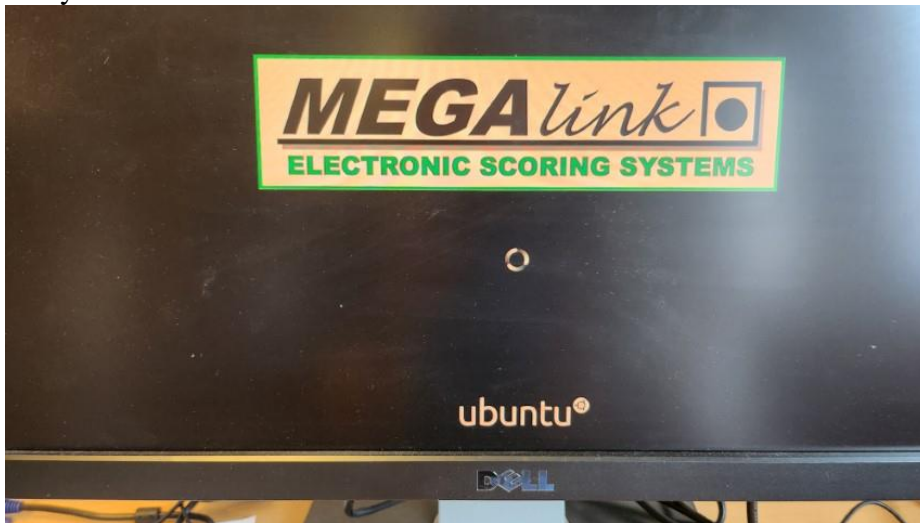


2.2 Setting ID on version 1


2.2.1 Display device ID setup

The display device must have the same ID as the monitor connected. Insert the SD card marked with the same number as the monitor target number.

- Insert the SD card.

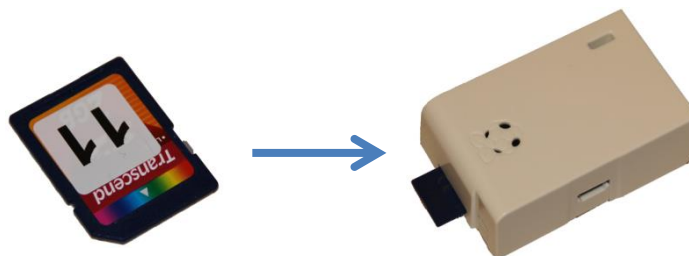

- Connect the device to the television via HDMI.

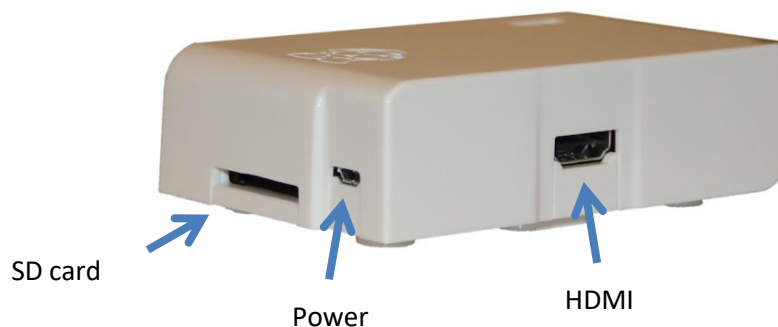

- Power up the device. Use the television USB as power source. External power can be used. DC 5.0V / 700mA.
- Wait for the Megalink logo to appear on the screen.

MEGAlink	Second monitor display kit	ML2000 User Manual	
DIF	ID: BRUK-DU-DISPLAY-001	28.01.2025	Ver.: 003

5. Shut down the device by simply remove the power source.
6. The device is ready for use. NB! The SD card must remain inserted.


2.2.2 Set new ID on the SD card

If you need to change the ID on the SD card you can do the following:

1. Insert the SD card to a SD card reader connected to the computer.



2. Download MLSetPiIp.zip from www.megalink.no/download.
3. Unzip the file and start the application MLSetPiIp.exe.

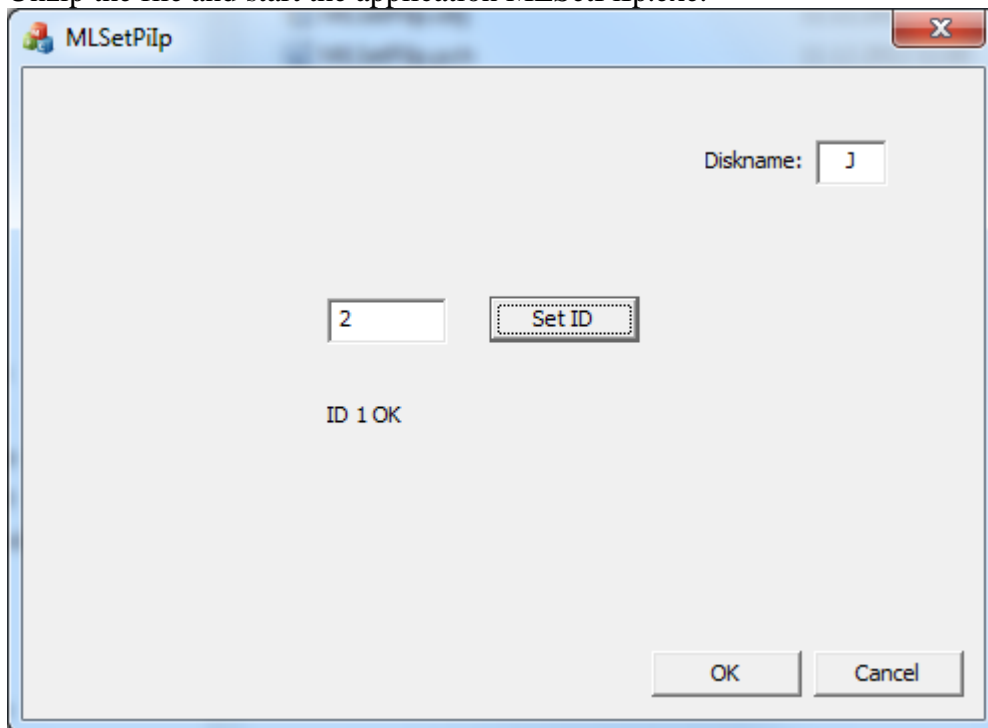

4. Enter the disk name of your SD card.
5. Enter the new ID. Press the **Set ID** button. Wait for the **ID OK** status.
6. Redo section 1.7.